



CONFERENCE
ROOM

Dune eVo dB

NEW BEGINNINGS

OFFICE - DUNE eVo DB

The higher attenuation performance of DUNE eVo dB offers a perfect solution for improving the privacy between adjacent spaces. Whilst the class-leading whiteness helps to create spaces that are brighter and better, and which offer a greater sense of well-being for your customers.


Key features

- Excellent sound attenuation (39 dB sound reduction) to eliminate the need for sound barriers in close office applications
- Enhanced acoustical absorption performance of 0.60 α_w for better acoustic comfort
- Improved aesthetics with discreet perforations, a smoother finish and a class-leading, fully painted whiteness

- Fully painted, reinforced edges for a more robust tile and greater durability
- Easy to handle and re-engineered for a better, easier fit

Application areas

Ideal for individual offices.

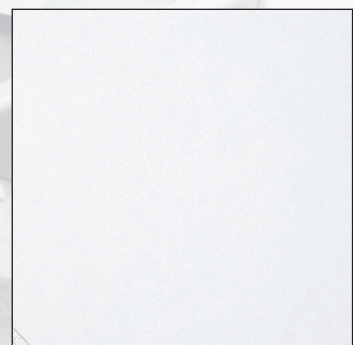

Inspiring Great Spaces®

Armstrong[®]
CEILING SOLUTIONS

EDGE DETAIL	BOARD	TEGULAR	MICROLOOK 90																																				
THICKNESS (mm)	19	19	19																																				
MODULES (mm)	600 x 6005477M	600 x 6005479M	600 x 6005481M																																				
SUSPENSION SYSTEMS	Prelude 24 XL ² /TLS Prelude 24 Sixty ² XL ² /TLS	Prelude 24 XL ² /TLS Prelude 24 Sixty ² XL ² /TLS	Prelude 15 TL & XL ² Interlude HRC XL ² Silhouette 15 XL ²																																				
COLOURS	 Global White																																						
SUSTAINABILITY	37 A+ E1																																						
ACOUSTICS	EN ISO 354 & EN ISO 11654 EN ISO 10848-2 & EN ISO 717-1 EN ISO 140-3 & EN ISO 717-1																																						
	<table border="1"> <thead> <tr> <th></th> <th>α_w</th> <th>D_{nfw}</th> <th>R_w</th> <th>Class</th> <th>NRC</th> <th colspan="6">Hz α_p</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>Board / Tegular / MicroLook 90</td> <td>0.60</td> <td>39 dB</td> <td>20 dB</td> <td>C</td> <td>0.55</td> <td>0.35</td> <td>0.40</td> <td>0.60</td> <td>0.65</td> <td>0.75</td> <td>0.65</td> </tr> </tbody> </table>				α_w	D_{nfw}	R_w	Class	NRC	Hz α_p												125	250	500	1000	2000	4000	Board / Tegular / MicroLook 90	0.60	39 dB	20 dB	C	0.55	0.35	0.40	0.60	0.65	0.75	0.65
	α_w	D_{nfw}	R_w	Class	NRC	Hz α_p																																	
						125	250	500	1000	2000	4000																												
Board / Tegular / MicroLook 90	0.60	39 dB	20 dB	C	0.55	0.35	0.40	0.60	0.65	0.75	0.65																												
FIRE REACTION		EEA Euroclass A2-s1, d0 EN 13501-1																																					
OTHER PERFORMANCES & FEATURES	85% $\lambda = 0.067$ W/m K <small>EN 12667 & ISO 8301</small>	95% RH 7.9 kg/m ²	 	30YEAR system guarantee																																			
CUSTOM OPTIONS	 Dimensions																																						